




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A47J 31/56	A1	(11) International Publication Number: WO 98/27853 (43) International Publication Date: 2 July 1998 (02.07.98)
(21) International Application Number: PCT/IB97/01184 (22) International Filing Date: 29 September 1997 (29.09.97) (30) Priority Data: 96309399.2 23 December 1996 (23.12.96) EP (34) Countries for which the regional or international application was filed: GB et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 7, Kista, S-164 85 Stockholm (SE). (72) Inventors: DAM, Peter; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). BAL, Marinus; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). WITZIERS, Cornelis; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). (74) Agent: ERTL, Nicholas, J.; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).	(81) Designated States: CN, JP, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.	

(54) Title: COFFEE MAKER

(57) Abstract

A coffee maker comprises a water reservoir, a water heating and supply device for supplying hot water to a filter device, the brewed coffee flowing from the filter device to a receptacle. The coffee maker includes a level detection circuit for detecting the water level in the reservoir, and this water level is used to control the brewing process so as to vary the flow of hot water to the filter device in dependence upon the water level in the reservoir. The water level may be used to control the power of a heating element in a continuous heater or may be used to control the operation of a pump in a pumped system.

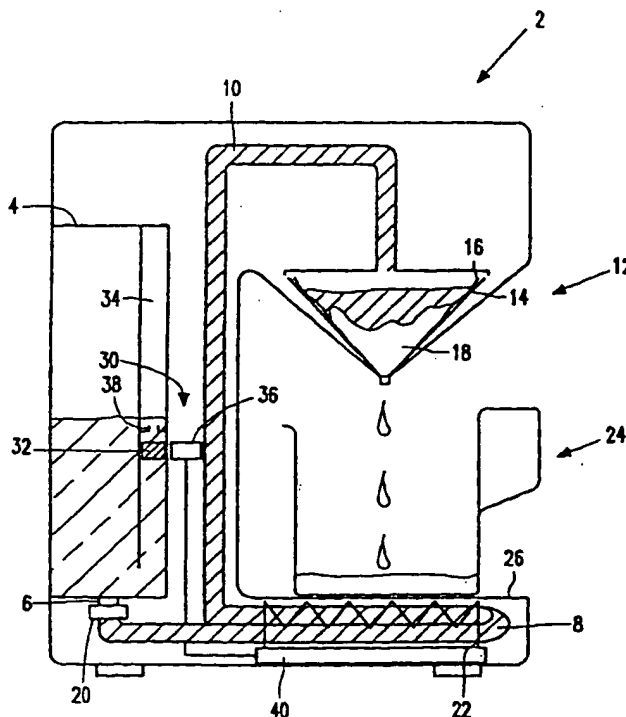

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

DESCRIPTION

COFFEE MAKER

5 This invention relates to coffee makers.

There are various types of coffee maker used for brewing coffee. One type includes a water reservoir which supplies a water duct which is heated by a heating element. The heating process results in the formation of steam in the duct, and the resulting pressure conditions cause hot water to be forced up a riser tube into a coffee filter. Such a system has continuous heating of water
10 in the duct during the brewing process, and this heating system will be referred to as a "continuous heater" in the following description.

Another type of coffee maker comprises a heated water reservoir, and hot water is supplied to a coffee filter under pressure by means of a pump.
15 Espresso coffee machines also use pumped heating systems, and generally operate with higher system pressures.

This invention is equally applicable to all these types of coffee maker.

It is known that the coffee making cycle should be adaptable to the amount of coffee to be made. In particular, an optimum range of brewing times
20 exists which provides a balance between the concentration of the coffee and the flavour. For this reason, the greater the quantity of coffee to be made, the higher should be the flow rate, so that the overall brewing time remains within the desired boundaries.

DE 2839140 discloses a coffee maker having a continuous heater, in which a manual selector is provided for indicating the quantity of coffee to be
25 brewed, and the selection made determines the effective power of the heating element. In a continuous heater, such as that used in DE 2839140, the power supplied by the heating element determines the flow rate up the riser pipe.

30 According to the invention, there is provided a coffee maker for brewing coffee comprising a water reservoir, a water heating and supply device for supplying hot water to a filter device, the brewed coffee flowing from the filter

device to a receptacle, wherein the coffee maker further comprises level detection means for detecting the water level in the reservoir, and wherein the water heating and supply device is controlled to vary the flow rate of hot water to the filter device in dependence upon the water level in the water reservoir.

5 The coffee maker of the invention provides automatic control of the brewing process so that the quality of brewed coffee is maintained irrespective of the amount of coffee to be brewed.

Preferably, the level detecting means monitors the water level, and the flow rate is controlled, during the brewing process. In this way, the flow rate
10 of water to the filtering device may be controlled as the water level in the reservoir drops during brewing.

The invention is applicable to a coffee maker having a continuous heater, in which case the water heating and supply device comprises a heating element which heats water in a conduit coupling the water reservoir and the
15 filter device, and the power of the heating element may then be controlled during the brewing process to vary the flow rate. The control of the power of the heating element is such that the flow rate is reduced as the water level in the reservoir drops. At the end of the brewing process, the flow rate of hot water to the filter device will always be set at the minimum level. This has the
20 advantage that a temperature surge which takes place during thermal cut-out at the end of the brewing process is reduced. Furthermore, the noise which may be produced at the end of the brewing cycle because of this temperature surge is also reduced.

The heating element may comprise a plurality of heating members
25 connected in parallel, at least one of which is disconnectable to enable adjustment of the heating element power.

The invention may also be applied to a pumped system, in which case the water heating and supply device comprises a heating element which heats the water in a heating chamber, and a pump which pumps water from the
30 heating chamber to the filter device, wherein the electrical load on the pump is controlled during the brewing process to vary the flow rate.

The heating chamber may comprise the water reservoir, or may

comprise an additional heating chamber.

The level detection means of the invention may comprise a float having a magnetic element, and at least one magnetic-field-responsive switch which is activated by the magnetic element when the water level is within
5 predetermined levels.

Alternatively, various other level detection systems may be employed, such as capacitive level sensors, or a float which is associated with a potentiometer.

The invention will now be described by way of example with reference
10 to and as shown in the accompanying drawings in which:

Figure 1 shows a continuous heating type coffee maker according to the invention;

Figure 2 shows a pumped coffee maker according to the invention;

Figure 3 shows a circuit for controlling the heating element of the coffee
15 maker of Figure 1;

Figure 4 shows a circuit for controlling the pump of the coffee maker of Figure 2.

Figure 1 shows a coffee maker having a continuous heater and which uses a level detection according to the invention. The coffee maker 2
20 comprises a water reservoir 4 having an outlet 6 which supplies a heating conduit 8 where water heating takes place. The heating conduit 8 is connected to a riser pipe 10 which discharges water above a filter device 12. The filter device 12 comprises a support 14 for a filter 16 for the coffee 18.

During use of the coffee maker 2 shown in Figure 1, water flows from the
25 reservoir 4 into the heating conduit 8 through a non-return valve 20. The water within the conduit 8 is heated by a heating element 22 which causes vaporisation of water within the conduit 8. This creates pressure within the conduit 8 driving heated water up the riser pipe 10 and into the filter device 12. Within the filter device 12, the water passes through the coffee 18 and into a
30 receptacle 24. The coffee in the receptacle 24 is kept hot by the base 26 within which the heating element 22 is housed. The operation of the coffee maker as described so far is conventional. The heating element 22, conduit 8

and riser pipe 10 together constitute a water heating and supply device.

The invention provides a level detection circuit 30 for detecting the water level within the reservoir 4. In example shown in Figure 1, the level detection circuit comprises a float 32 provided within a vertical channel 34. The float
5 includes a magnetic portion which interacts with a magnetic reed switch 36 (or Hall sensor) at a particular level. A stop 38 limits the upward movement of the float 32 so that the float 32 interacts with the reed switch 36 for all water levels within the reservoir 4 above a predetermined level. Thus, the level detection circuit 30 provides a binary output representing a high or low water level.

10 The level detection circuit 30 is connected to, or comprises part of, the control circuit 40 of the heating element 22, so that the water level within the reservoir 4 determines the operation of the heating element 22.

For high water levels in the reservoir 4 the heating element 22 is operated with a higher power than when the water level in the reservoir 4 is at
15 a low level. The power of the heating element 22 determines the pressure conditions within the heating conduit 8, and thereby determines the flow rate up the riser pipe 10. Consequently, the control of the heating element 22 may be used to alter the flow rate of water to the filter device 12 depending upon the water level. This has been found to be desirable so that the brewing time
20 for the coffee may be maintained within predetermined boundaries which provide a desired balance between the strength and the flavour of the brewed coffee for optimal taste.

The level detection circuit 30 preferably monitors the water level in the reservoir 4 during the brewing process, namely as the water level drops. Thus,
25 the flow rate may be controlled during the brewing process so that switching takes place as the water level in the reservoir drops. This has the advantage that the lower flow rate is always implemented at the end of the brewing process. The brewing process ends when all water in the reservoir 4 has been heated by the heating element 22, and a thermostatic switch detects a rise in
30 the temperature in the vicinity of the heating element which is caused by the absence of water. This causes the heating element circuit to switch off, but there is a continued rise in temperature within the heating conduit 8 for some

time after the circuit is switched off. This results in a high temperature surge at the end of the brewing process and produces undesirable noise. By ensuring that the heating element is switched to a low power at the end of the brewing process, the temperature surge and the noise are both reduced.

5 Figure 2 shows a pumped coffee maker 2 which also incorporates a level detection system of the invention. Similar components to the system shown in Figure 1 have been given the same reference numerals. In the system of Figure 2, water in the reservoir 4 is initially heated by the heating element 22 before being pumped to the filter device 12 by a pump 42. In this case, the
10 heating element constitutes a water heating device, and the pump constitutes a water supply device. The pump 42 may only be operated once the temperature of the water in the reservoir 4 has reached the required temperature. The heating element is controlled thermostatically to maintain the desired water temperature. The heating element 22 may alternatively be
15 provided in a separate heating chamber (which is smaller than the reservoir 4) but again the water is only pumped once it has reached the desired temperature. In the embodiment shown in Figure 2 the level detection circuit 30 is connected to, or forms part of, the control circuit for the pump 42, so that the pump flow rate may be adjusted depending upon the water level within the
20 reservoir 4. As will be described in the following, the flow rate may be controlled by varying the speed of the pump through control of the electrical load connected in the pump control circuit, or alternatively the flow rate may be controlled by introducing a variable flow constriction such as a valve. The level detection circuit shown in Figure 2 is identical to that of Figure 1 and again
25 provides a binary signal for indicating a high or low water level within the reservoir 4.

Figure 3 shows in greater detail how the level detection circuit 30 may be used to control the operation of the heating element 22 in the embodiment of Figure 1. As shown, the heating element 22 comprises two heating
30 members R1, R2 connected in parallel between power lines 44. One of the heating members R1 is connected in series with the magnetic reed switch 36 so that the heating member R1 may be switched in and out of the heating

control circuit 40. The switch 36 is represented in Figure 3 is a normally-open switch, so that when the float 32 is at the level of the stop 38 (i.e. for all high liquid levels), the magnetic coupling between the float 32 and the switch 36 causes the switch 36 to close. This maintains the heating member R1 in the circuit, and causes a high overall power of the heating element 22. For example, the heating member R1 may have a power of 0.9 KW, and the heating member R2, which is permanently connected, may have a power of 0.5 KW. The thermostatic control is represented schematically as switch 46.

The heating element 22 may alternatively comprise a single element, and the voltage applied to the terminals may be adjusted to regulate the power. As a further alternative, the effective power of a single heating element may be adjusted by varying the duty cycle governing the operation of the element.

The heating element 22 may comprise an immersion type heating element, or it may comprise a printed heating track for example on the base of the water reservoir.

Although level control which provides only two signals has been described, it is of course equally possible to provide a level detection enabling more accurate level measurement. Figure 4 shows a circuit which enables more accurate level detection, and which is appropriate for a pumped coffee maker such as that shown in Figure 2. In Figure 4, the float 32 interacts with one of a number of normally open reed switches (or all Hall sensors) 36. The control circuit for the pump 42 comprises a load connected in series with the pump 42 which is variable depending upon the water level in the reservoir 4. In Figure 4, the load comprises a permanently connected load resistor L6 which is coupled in parallel with one of the further load resistors L1 to L5 in dependence upon the water level. The position of the float 32 determines which switch 36 is closed by magnetic coupling, and thereby determines the overall load connected in series with the pump 42. This series-connected load determines the speed of the pump 42, and thereby determines the flow of water to the filter 12.

As an alternative to controlling the electrical load of the pump, the mechanical load for the pump may be controlled by introducing a variable flow

constriction such as a valve, which is controlled by the level sensor signal.

Although a level sensor relying upon magnetic coupling between a floating magnet and a switch responsive to magnetic fields has been described, various other level detection circuits may be employed. For example, a float
5 may mechanically activate a potentiometer circuit to adjust a resistor value in order to obtain the desired pump control, or heating element control. As a further alternative, capacitive level sensors are known in which the water in the reservoir 4 acts as a dielectric, to enable capacitive level measurement. Various other possibilities known in the field of fluid level measurement will be
10 known to those skilled in the art.

CLAIMS

1. A coffee maker for brewing coffee comprising a water reservoir, a water heating and supply device for supplying hot water to a filter device, the brewed coffee flowing from the filter device to a receptacle, characterised in that the coffee maker further comprises level detection means for detecting the water level in the reservoir, wherein the water heating and supply device is controlled to vary the flow rate of hot water to the filter device in dependence upon the water level in the water reservoir.
2. A coffee maker as claimed in claim 1, wherein the level detection means monitors the water level during the brewing process, and the flow rate is controlled during the brewing process.
3. A coffee maker as claimed in claim 1 or 2, wherein the water heating and supply device comprises a heating element which heats water in a conduit coupling the water reservoir and the filter device, and wherein the power of the heating element is controlled during the brewing process to vary the flow rate.
4. A coffee maker as claimed in claim 3, wherein the heating element comprises at least two heating members connected in parallel, at least one of which may be disconnected to enable adjustment of the heating element power.
5. A coffee maker as claimed in claim 1 or 2, wherein the water heating and supply device comprises a heating element which heats the water in a heating chamber, and a pump which pumps water from the heating chamber to the filter device, and wherein the electrical load on the pump is controlled during the brewing process to vary the flow rate.
6. A coffee maker as claimed in claim 5, wherein the heating

chamber comprises the water reservoir.

7. A coffee maker as claimed in any preceding claim, wherein the level detection means comprises a float having a magnetic element and at least
5 one magnetic-field-responsive switch, which is actuated by the magnetic element when the water level is between predetermined levels.

1/3

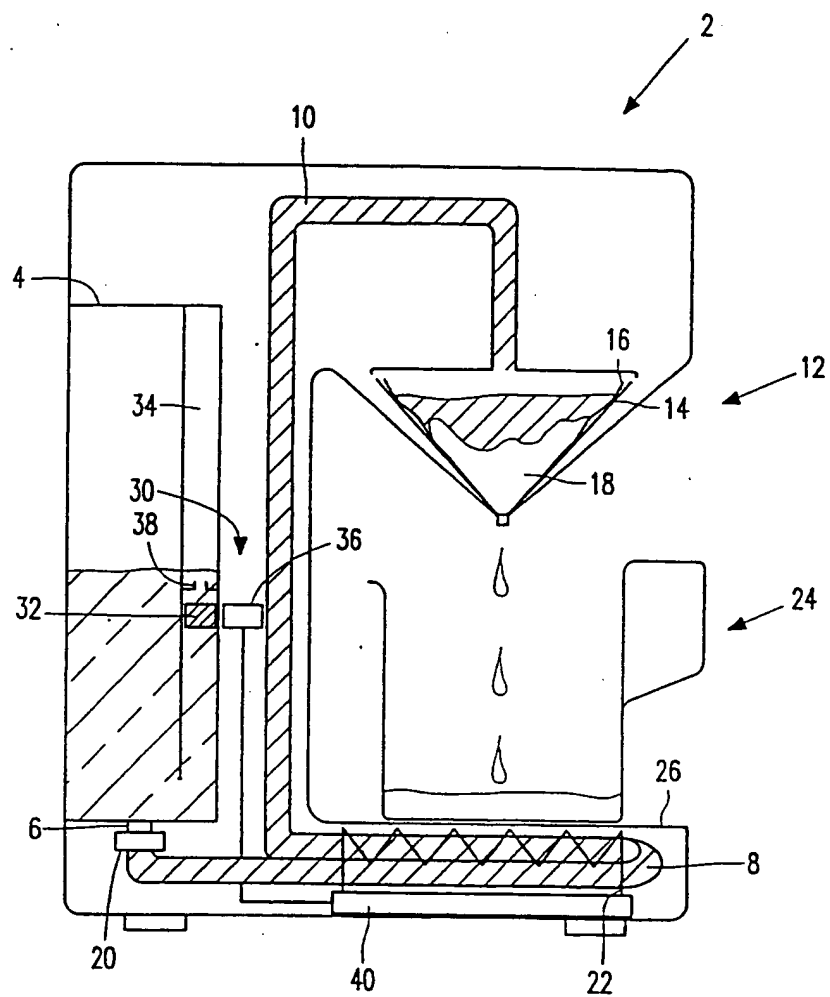


FIG. 1

2/3

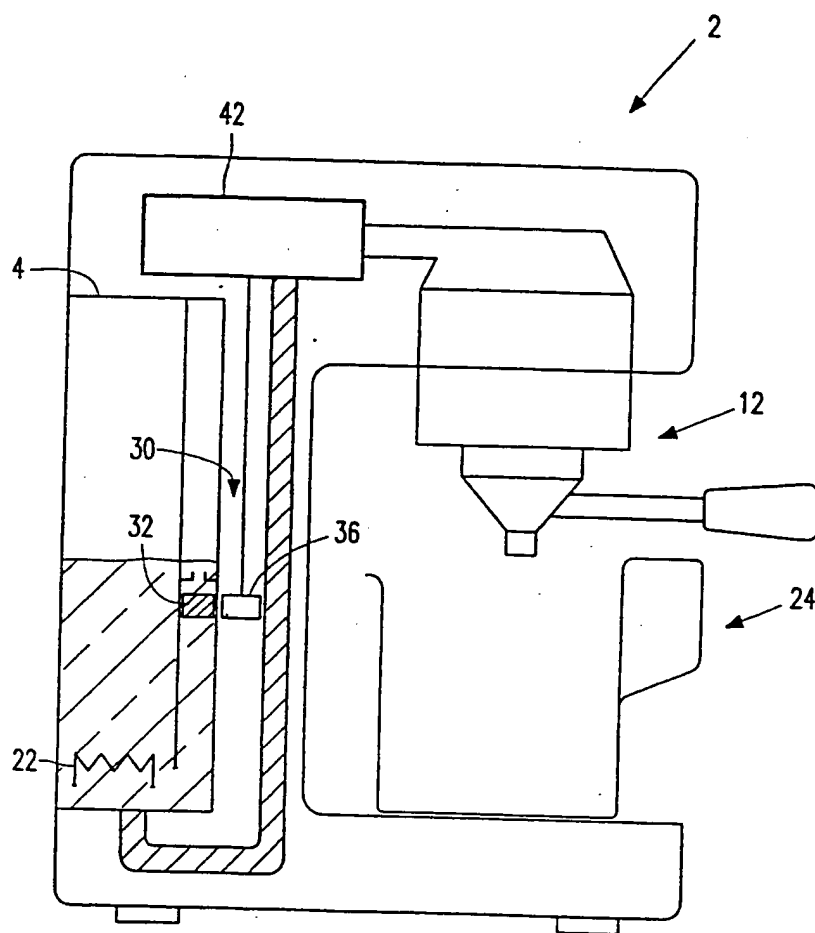


FIG. 2

3/3

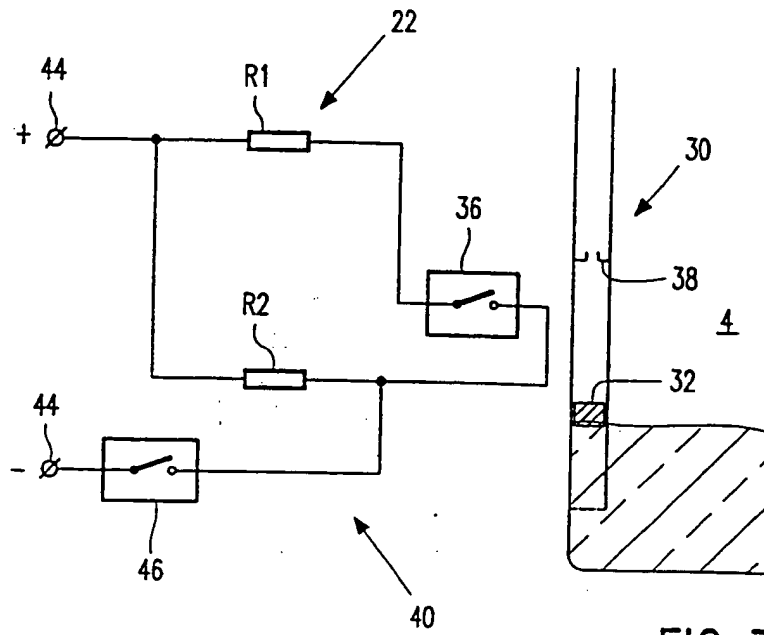


FIG. 3

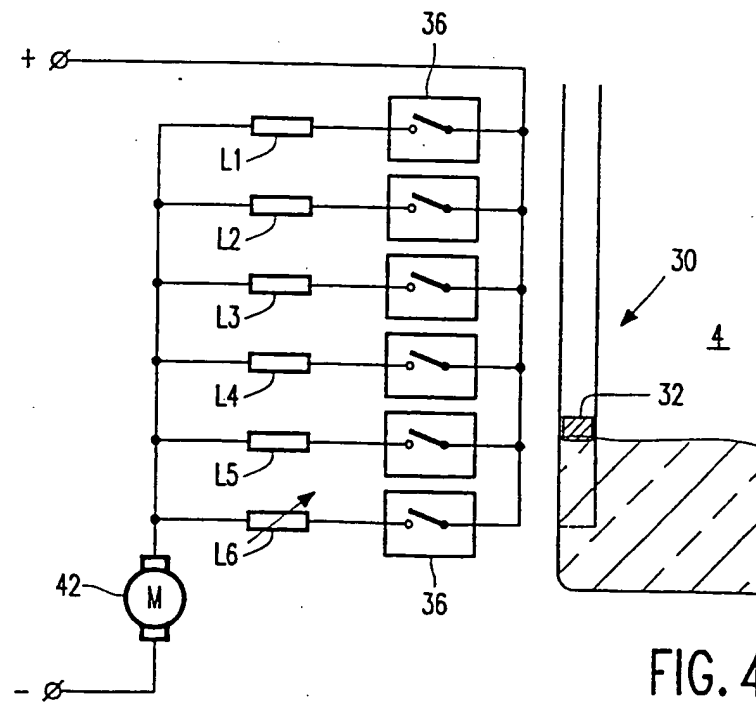


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 97/01184

A. CLASSIFICATION OF SUBJECT MATTER		
IPC6: A47J 31/56 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED		
Minimum documentation searched (classification system followed by classification symbols)		
IPC6: A47J		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
SE,DK,FI,NO classes as above		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
WPI		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	US 5623574 A (J.T.KNEPLER), 22 April 1997 (22.04.97), column 2, line 20 - line 52, claims 1-5	1-6
	--	
Y	JP 64-174449 A (MATSUSHITA ELECTRIC IND LTD), 20 February 1991 (20.02.91), abstract, see fig.	1-6
	--	
Y	JP 64-174470 A (MATSUSHITA ELECTRIC IND CO LTD), 20 February 1991 (20.02.91), abstract, see fig.	1-6
	--	
A	US 5063836 A (D.U.PATEL), 12 November 1991 (12.11.91), figure 1, abstract	1-7
	--	

<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search		Date of mailing of the international search report
7 January 1998		15.01.1998
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86		Authorized officer Agneta Änggård Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

SALTON-061943

INTERNATIONAL SEARCH REPORT
Information on patent family members

02/12/97

International application No.
PCT/IB 97/01184

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5623574 A	22/04/97	CA 2180406 A US 5647055 A	26/03/97 08/07/97
JP 64-174449 A	20/02/91	NONE	
JP 64-174470 A	20/02/91	NONE	
US 5063836 A	12/11/91	AU 4953590 A CA 1299624 A EP 0455673 A WO 9008494 A	24/08/90 28/04/92 13/11/91 09/08/90

Form PCT/ISA/210 (patent family annex) (July 1992)

SALTON-061944